

DATABASE MANAGEMENT SYSTEMS LABARATORY MANUAL (20CS56)

B.Tech. (II Year I Sem.)



DEPARTMENT OF INFORMATION TECHNOLOGY

LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (Under Tier - I) ISO 9001:2015 Certified Institution

Approved by AICTE, New Delhi. and Affiliated to JNTUK, Kakinada

L.B. REDDY NAGAR, MYLAVARAM, KRISHNA DIST., A.P.-521 230.

Pre-requisite : Programming language, Discrete Mathematical Structures, and Data Structures.

Course Educational Objective: The objective of this lab is to provide a strong formal foundation in database concepts, technology, and practice to the participants to groom them into well-informed database application developers.

Course Outcomes (CO): At the end of this course, the student will be able to:

CO1: Create & manipulate the relational database using SQL.(Apply- L3)

CO2: Implement Views, procedures, triggers, and cursors on relational database. (Apply- L3)

CO3: Create Unstructured Databases using MongoDB.(Apply- L3)

CO 4: Improve individual / teamwork skills, communication & report writing skills with ethical values.

Introduction: Language basics and example queries (one or two weeks).

1) Create a table STUDENT with appropriate data types and perform the following queries.
Attributes are Roll number, student name, date of birth, branch and year of study.

- a) Insert 5 to 10 rows in a table?
- b) List all the students of all branches
- c) List student names whose name starts with 's'.
- d) List student names whose name contains 's' as third literal.
- e) List student names whose contains two 's' anywhere in the name
- f) List students whose branch is NULL.
- g) List students of CSE & ECE who born after 1980.
- h) List all students in reverse order of their names.
- i) Delete students of any branch whose name starts with 's'.
- j) Update the branch of CSE students to ECE. k) Display student name padded with *'after the name of all the students.

2) Create the following tables based on the above Schema Diagram with appropriate data Types and constraints and perform the following queries.

SAILORS (Sailid, Salname, Rating, Age)

RESERVES (Sailid, boatid, Day)

BOATS (Boatid, Boat-name, Color)

- a) Insert 5 to 10 rows in all tables?
- b) Find the name of sailors who reserved boat number 3.
- c) Find the name of sailors who reserved green boat.
- d) Find the colors of boats reserved by Ramesh.
- e) Find the names of sailors who have reserved at least one boat.
- f) Find the allsailid of sailors who have a rating of 10 or have reserved boated 104.
- g) Find the Sailid's of sailors with age over 20 who have not registered a red boat.
- h) Find the names of sailors who have reserved a red or green boat.
- i) Find sailors whose rating is better than some sailor called Salvador.
- j) Find the names of sailors who are older than the oldest sailor with a rating of 10


3) Schema Diagram for the rest of the SQL and PLSQL Programs.

Create the following tables based on the above Schema Diagram with appropriate data types and constraints.

EMPLOYEE (Fname, Mname, Lname, SSN, Bdate, Address, Gender, Salary,
SuperSSN,Dno)

DEPARTMENT (Dnumber, Dname, MgrSSN, Mgrstartdate)

DEPENDENT (ESSN, Dependent_Name, Gender, Bdate, Relationship)

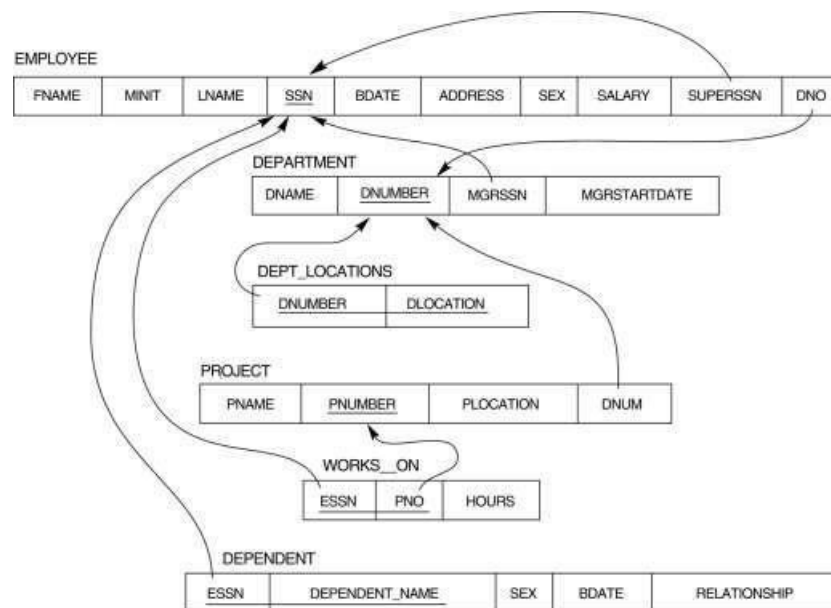

- Insert 5 to 10 rows into all the tables.
 - Display all employees' names along with their department names.
 - Display all employees' names along with their dependent details.
 - Display name and address of all employees who work for Research department.
 - List the names of all employees with two or more dependents.
 - List the names of employee who have no dependents.
 - List the names of employees who have at least one dependent.
 - List the names of the employees along with names of their supervisors using aliases.
 - Display name of the department and name of manager for all the departments.
 - Display the name of each employee who has a dependent with the same first name and gender as the employee.
- 4) Create the following tables based on the above Schema Diagram with appropriate data Types and constraints in addition to the tables in Experiment 2.
- DEPT_LOCATIONS (Dnumber, Dlocation)
- PROJECT (Pname, Pnumber, Plocation, Dnum)
- WORKS_ON (ESSN, Pno, Hours)
- Insert 5 to 10 rows into all the tables.
 - Find the names of the employees who work on all the projects controlled by the department Research.
 - List the project number, name and no. Of employees who work on that project for all the projects.
 - List the names of all the projects controlled by the departments department wise.
 - Retrieve the names of employees who work on all projects that John works on.
 - List the project numbers for projects that involve an employee either as worker or as a manager of the department that controls the project.
 - List the names of all employees in one department who work more than 10 hours on one specific project.
 - For each project, list the project name and total hours (by all employees) spent on that project.
 - Retrieve the names of all employees who work on every project.
 - Retrieve the names of all employees who do not work on any project.
- 5) Create a view that has project name, controlling department name, number of employees and total hours worked on the project for each project with more than one employee working on it.
- List the projects that are controlled by one department from this view.
 - List the managers of the controlling departments for all the projects.
 - Demonstrate one update operation on this view.
 - List the Location of the controlling departments for all the projects.

- e) Retrieve the data from the view.
- 6) Create a view emp from employee such that it contains only emp_noemp_name and department.
 - 7) Create a view dept from department with only dept_no and location.
 - 8) Create a view that contains the details of employees who are managers only.
 - 9) Write a procedure to check whether the given number is Armstrong or not.
 - 10) Write a procedure which accept the account number of a customer and retrieve the balance.
 - 11) Write a procedure which accepts the student number and displays the department in which he belongs to.
 - 12) Create a cursor to modify the salary of all employees belonging to 'Research' department by 150%.
 - 13) Consider the college database. Retrieve all students who have registered for a specific course and store their details into another table using Cursors.
 - 14) Write an update trigger on Account table. The system should keep track of the records that are being updated.
 - 15) Create NoSQL database for a sample application and perform CURD operations.

Design Database for any one of the following Case Studies

Case Study1 : Hospital Management System

Case Study2 : Railway Reservation

Case Study3 : Painting Hire Business

1) Create a table STUDENT with appropriate data types and perform the following queries.

Attributes are Roll number, student name, date of birth, branch, and year of study.

```
mysql> create table student(Roll_number int
primarykey, student_name varchar(20), date_of_birth date, branch
varchar(5), year_of_study int);
```

a) Insert 5 to 10 rows in a table?

```
mysql> insert into student( Roll_number, student_name,
date_of_birth, branch, year_of_study) values (222, "venkat", "
1991-09-26", "cse", 2020),
(333, 'siva', '1990-04-10', 'AIDS', 2021),
(111, "srikanth", "1990-03-16", "cse", 2020),
(444, 'Rajani', '1980-05-12', 'IT', 2010),
(555, 'Sindhu', '1993-03-26', 'ECE', 2017),
(666, 'Nayana', '1995-05-05', 'AIML', 2002);
```

```
mysql> select * from student;
```

```
--+-----+-----+-----+-----+-----+-----+-----+-----+
|Roll_number|student_name|date_of_birth|branch|year_of_study|
--+-----+-----+-----+-----+-----+-----+-----+-----+
| 111|srikanth  |1990-03-16   |cse  |2020|
| 222|venkat    |1991-09-26   |cse  |2020|
| 333|siva     |1990-04-10   |AIDS  |2021|
| 444|Rajani    |1980-05-12   |IT   |2010|
| 555|Sindhu    |1993-03-26   |ECE  |2017|
| 666|Nayana    |1995-05-05   |AIML  |2002|
--+-----+-----+-----+-----+-----+-----+-----+-----+
---
```

b) List all the students of all branches

```
mysql> select student_name from student;
```

```
---+-----+
|student_name|
---+-----+
|srikanth    |
|venkat      |
| siva       |
|Rajani      |
|Sindhu      |
|Nayana      |
---+-----+
-----
```

```
6 rows inserted(0.00sec)
```

C) list all student names start with 's'

```
mysql>select student_name from student where student_name
      like's%';
```

```
| student_name |
```

— — — — —

```
|srikanth|
```

| siva |

| Sindhu |

```
3 rowsinset (0.00sec)
```

d) List student names whose name contains 's' as the third literal

```
mysql>select * from student where student name like 's%';
```

Emptyset (0.00sec)

e) liststudentnameswhosecontainstwo's'anywhere

```
mysql> select student_name from student where student_name
like '%s%s%';
```

Emptyset (0.00sec)

f) list of students whose branch is null

```
mysql>insert into student (Roll_number,student_name,
    date_of_birth,branch,year_of_study)values
    (777,'nandana','2003-04-28',null,2020);
```

```
mysql>select *from student;
```

```

-----+-----+-----+-----+-----+-----+
|Roll_number|student_name|date_of_birth|branch|year_of_study|
-----+-----+-----+-----+-----+
| 111|srikanth  |1990-03-16   |cse  |2020|
| 222|venkat    |1991-09-26   |cse  |2020|
| 333|siva     |1990-04-10   |AIDS |2021|
| 444|Rajani    |1980-05-12   |IT   |2010|
| 555|Sindhu   |1993-03-26   |ECE  |2017|
| 666|Nayana   |1995-05-05   |AIML |2002|
| 777|nandana  |2003-04-28   |NULL |2020|

```

```
7 rows in set (0.01 sec)
```

```
mysql>select *from student where branch isnull;
```

```

+-----+-----+-----+-----+-----+
|Roll_number|student_name|date_of_birth|branch|year_of_study|
+-----+-----+-----+-----+-----+
|      777  |nandana    |2003-04-28   | NULL |      2020   |

```

```
1 rowinset (0.00sec)
```

g)List students of CSE & ECE who born after 1980.

```
mysql>select * from student where branch in('cse','ECE')and
      date_of_birth>1980;
```

```
+-----+-----+-----+-----+-----+-----+-----+-----+
|Roll_number|student_name|date_of_birth|branch|year_of_study|
+-----+-----+-----+-----+-----+-----+-----+-----+
|      111|srikanth   |1990-03-16   |cse   |      2020|
|      222|venkat     |1991-09-26   |cse   |      2020|
|      555|Sindhu     |1993-03-26   |ECE   |      2017|
+-----+-----+-----+-----+-----+-----+-----+-----+
3rowsinset,1warning(0.00sec)
```

h)List all students in reverse order of their names

```
mysql>select reverse(student_name)from student;
```

i) Delete students of any branch whose name starts with 's'.

```
mysql> delete from student where student_name like "s%";
QueryOK,3rowsaffected(0.06sec)
```

```
mysql>select*from student;
```

```
+-----+-----+-----+-----+-----+-----+-----+-----+
|Roll_number|student_name|date_of_birth|branch|year_of_study|
+-----+-----+-----+-----+-----+-----+-----+-----+
|      222|venkat     |1991-09-26   |cse   |      2020|
|      444|Rajani     |1980-05-12   |IT    |      2010|
|      666|Nayana     |1995-05-05   |AIML  |      2002|
|      777|nandana    |2003-04-28   |NULL  |      2020|
+-----+-----+-----+-----+-----+-----+-----+-----+
4 rowsinset(0.00sec)
```

To disable auto commit use

```
mysql>set autocommit=false;
```

```
QueryOK,0rowsaffected(0.03sec)
```

i)update the branch of cse students to ece

```
mysql>update student set branch='ece' where branch='cse';
Query OK, 1 row affected (0.00 sec)Rows matched: 1
```

```
Changed: 1 Warnings: 0
```

```
mysql>select*from student;
```

```
+-----+-----+-----+-----+-----+-----+-----+-----+
|Roll_number|student_name|date_of_birth|branch|year_of_study|
+-----+-----+-----+-----+-----+-----+-----+-----+
|      222|venkat     |1991-09-26   |ece   |      2020|
|      444|Rajani     |1980-05-12   |IT    |      2010|
|      666|Nayana     |1995-05-05   |AIML  |      2002|
|      777|nandana    |2003-04-28   |NULL  |      2020|
+-----+-----+-----+-----+-----+-----+-----+-----+
4 rowsinset(0.00sec)
```

To create a savepoint we need to start the transtaction

first.mysql>starttransaction;

```
Query OK, 0 rows
```

```
affected
```

```
transaction-1
transaction-2
transaction-3
transaction-4
transaction-5
savepointA;
```

```
transaction-6
transaction-7
transaction-8
ifwerollbacktoA;
```

```
-----
thentransaction-6,7,8areremoved.
```

j)display student name padded with * after the name of all the students.

```
mysql>selectRPAD(student_name,30,"*") as Name fromstudent;
--+-+-----
| Name |
--+-+-----
|venkat*****|
|Rajani*****|
|Nayana*****|
|nandana*****|
--+-+-----
4 rowsinset(0.00sec)
```

2) Create the following tables with appropriate data types and constraints and perform the following queries.

SAILORS (Saild,Salname,Rating,Age)
RESERVES (Sailid, boatid, Day)
BOATS (Boatid,Boat-name,Color)

TABLE CREATION:-

```
mysql>create table sailors(Sailid int primary key, Salname
varchar(20),Ratingint,Ageint);
```

```
mysql>create table boats (Boatid int primary key,Boat_name
varchar(20),colorvarchar(10));
```

```
mysql>create table reserves(Sailid int, Boatid int, day
date, foreign key(Sailid)references sailors(Sailid),
```

```
-----
foreign key(Boatid) references boats(Boatid));
```

```
mysql>show tables;
```

```
+ -----+
|Tables_in_20761A0589|
+ -----+
| boats      |
| reserves   |
| sailors    |
```

3 rows in set (0.01 sec)

mysql>desc reserves;

Field	Type	Null	Key	Default	Extra
Sailid	int	YES	MUL	NULL	
Boatid	int	YES	MUL	NULL	
day	date	YES		NULL	

rowsinset(0.00sec)

mysql>desc sailors;

Field	Type	Null	Key	Default	Extra
Sailid	int	NO	PRI	NULL	
Salname	varchar(20)	YES		NULL	
Rating	int	YES		NULL	
Age	int	YES		NULL	

rowsinset(0.00sec)

mysql>desc boats;

Field	Type	Null	Key	Default	Extra
Boatid	int	NO	PRI	NULL	
Boat_name	varchar(20)	YES		NULL	
color	varchar(10)	YES		NULL	

3 rows in set (0.00 sec) INSERTING DATA:-

mysql> insert into sailors

(Sailid,Salname,Rating,Age)values (22,'Dustin',7,45), (29,'Brutus',1,33), (31,'Lubber',8,55),
(32,'Andy',8,25), (58,'Rusty',10,35), (64,'Horatio',7,35),
(71,'Zobra',10,16), (74,'Horatio',9,35),
(85,'Art',3,25), (95,'Bob',3,63.5);

mysql>insert into boats(Boatid,Boat_name,color)

values(101,'Interlake','Blue'), (102,'Interlake','Red'), (103,'Clipper','Green'), (104,'Marine','Red');

mysql>insert into reserves(Sailid,Boatid,Day)

values(22,101,'1998-10-10'), (22,102,'1998-08-13'), (22,103,'1984-05-24'), (22,104,'1990-06-13'), (31,102,'1997-02-13'), (31,103,'1998-06-11'), (31,104,'1998-12-11'), (64,101,'1998-05-09'), (64,102,'1998-07-09'), (74,103,'1998-07-09');

a) Find the name of sailors who reserved boat number 3.

```
mysql> select s.Salname from sailors s, reserves r where
s.Sailid=r.Sailid and r.Boatid=3;
mysql> show tables;
```

```
-----+-----+-----+
|Tables_in_20761A0589|
-----+-----+-----+
| boats              |
| reserves           |
| sailors             |
-----+-----+-----+
```

```
mysql> select * from boats;
```

```
-----+-----+-----+
|Boatid|Boat_name |color|
-----+-----+-----+
| 101   |Interlake|Blue   |
| 102   |Interlake|Red    |
| 103   |Clipper  |Green  |
| 104   |Marine   |Red    |
-----+-----+-----+
```

```
mysql> select * from reserves;
```

```
-----+-----+-----+
|Sailid|Boatid|day  |
-----+-----+-----+
|22    |101   |1998-10-10|
|22    |102   |1998-08-13|
|22    |103   |1984-05-24|
|22    |104   |1990-06-13|
|31    |102   |1997-02-13|
|31    |103   |1998-06-11|
|31    |104   |1998-12-11|
|64    |101   |1998-05-09|
|64    |102   |1998-07-09|
|74    |103   |1998-07-09|
-----+-----+-----+
```

```
mysql> select * from sailors;
```

```
-----+-----+-----+
|Sailid|Salname|Rating|Age  |
-----+-----+-----+
|22    |Dustin |7      |45   |
|29    |Brutus |1      |33   |
|31    |Lubber |8      |55   |
|32    |Andy   |8      |25   |
|58    |Rusty  |10     |35   |
|64    |Horatio|7      |35   |
|71    |Zobra  |10     |16   |
|74    |Horatio|9      |35   |
|85    |Art    |3      |25   |
|95    |Bob    |3      |64   |
-----+-----+-----+
```

```
mysql> select s.Salname from sailors s, reserves r where
        s.Sailid =r.Sailidandr.Boatid=103;
```

```
--+---+-----
| Salname|
--+---+-----
| Dustin|
| Lubber|
| Horatio|
--+---+-----
```

```
-----
-----
3 rowsinset(0.00sec)
```

b) Find the name of sailors who reserved green boat.

```
mysql>select s.Salname from sailors s, reserves r, boats b
        where s.Sailid=r.Sailid and r.Boatid=b.Boatid and
        b.color='Green';
```

```
--+---+-----
| Salname|
--+---+-----
| Dustin|
| Lubber|
| Horatio|
--+---+-----
```

```
rowsinset(0.00sec)
```

```
-----
-----
```

c) Find the color of boats reserved by Dustin

```
mysql> select color from boats inner join reserves on
        reserves.Boatid =boats.Boatid innerjoin sailors on
        sailors.Sailid=reserves.Sailid where Salname='Dustin';
```

```
+---+---+
| color|
+---+---+
| Blue |
| Red  |
| Green|
| Red  |
+---+---+
```

d) Find the names of the sailors who have reserved atleast one boat.

```
mysql>select s.Salname from sailors s,reserves r where
        s.Sailid=r.Sailid;
```

```
--+---+-----
| Salname|
--+---+-----
| Dustin|
| Dustin|
| Dustin|
```

```
| Dustin|
| Lubber|
| Lubber|
```

```

|Lubber|
|Horatio|
|Horatio|
|Horatio|
--+-+-----
10rowsinset(0.00 sec)
-----
-----

```

e) Find the all sailid of sailors who have a rating of 10 or have reserved boate 104.

```

mysql>select Salname from sailors innerjoin reserves on
        sailors.Sailid=reserves.Sailid where Rating=10 o
        rBoatid=104;

```

```

--+-+-----
|Salname|
--+-+-----
|Dustin |
|Lubber |
--+-+-----

```

```

-----
2 rowsinset(0.00sec)

```

f)Find the Sailid's of sailors with age over 20 who have not registered a redboat.

```

mysql> select distinct s.Sailid from sailors s,boats
        b,reserves r where s.Sailid = r.Sailid and r.Boatid =
        b.Boatid and s.Age> 20 and b.color !='Red';

```

```

+ -----+-----
|Sailid|
+ -----+-----
|    22|
|    64|
|    31|
|    74|
+ -----+-----

```

g)Find the names of sailors who have reserved a red or green boat.

```

mysql> select s.Salname from sailors s, boats b, reserves r
        where s.Sailid = r.Sailid and r.Boatid = b.Boatid and
        (b.color = 'Red' orb.color='Green');

```

```

-----+-----
|Salname|
-----+-----
|Dustin  |
|Lubber  |
|Horatio|
|Dustin  |
|Lubber  |
|Horatio|
|Dustin  |
|Lubber  |

```

```

-----
7 rowsinset(0.00sec)

```

h) Find sailors whose rating is better than some sailor called Salvador.

```
mysql> select Salname from sailors where Rating > (select
        Rating from sailors where Salname='Dustin');
```

```
+---+-----
|Salname|
+---+-----
|Lubber |
|  Andy  |
|  Rusty |
|  Zobra |
|Horatio|
+---+-----
```


4 rowsinset(0.00sec)

i) Find the names of sailors who are older than the oldest sailor with aratingof10.

```
mysql>select Salname from sailors where Age>(select max(Age)from
        sailors where Rating=10);
```

```
+-----+-----
|Salname|
+-----+-----
|Dustin  |
|Lubber  |
| Bob    |
+-----+-----
```

3) Schema Diagram for the rest of the SQL and PLSQL Programs.Create the following tables based on the above Schema Diagram withappropriatedatatypesandconstraints.

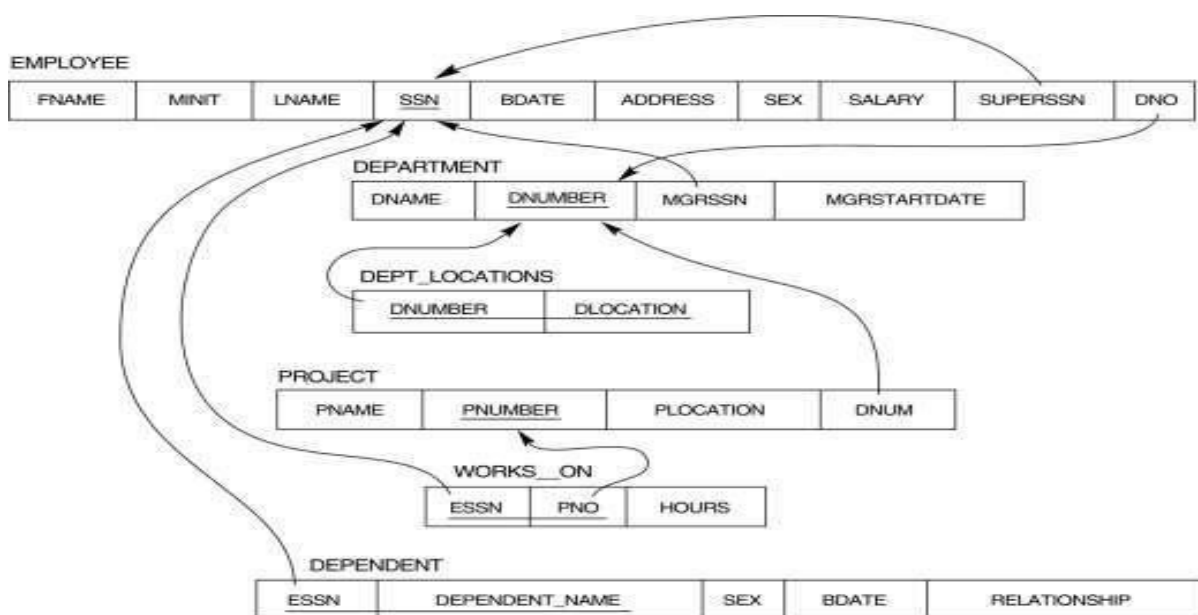

EMPLOYEE (Fname, Mname, Lname, SSN, Bdate, Address, Gender, Salary, SuperSSN, Dno)

DEPARTMENT (Dnumber, Dname, MgrSSN, Mgrstartdate)

DEPENDENT (ESSN, Dependent_Name, Gender, Bdate, Relationship)

TABLE CREATION:-

DEPARTMENT TABLE:-

```
CREATE TABLE DEPARTMENT (DNO VARCHAR(20) PRIMARY KEY, DNAME  
VARCHAR(20), MGRSTARTDATE DATE);
```

EMPLOYEE TABLE:

```
CREATE TABLE EMPLOYEE (FNAME VARCHAR(20), MNAME VARCHAR(20),  
LNAME VARCHAR(20), SSN VARCHAR(20) PRIMARY KEY, DOB DATE,  
ADDRESS VARCHAR(20), GENDER VARCHAR(10), SALARY INTEGER, SUPERSSN  
VARCHAR(20) REFERENCES EMPLOYEE(SSN), DNO VARCHAR(20) REFERENCES  
DEPARTMENT(DNO));
```

NOTE: Once DEPARTMENT and EMPLOYEE tables are created we must alter department table to add foreign constraint MGRSSN using sql command

```
ALTER TABLE DEPARTMENT ADD MGRSSN VARCHAR(20) REFERENCES  
EMPLOYEE(SSN);
```

DEPENDENT TABLE:

```
CREATE TABLE DEPENDENT (ESSN VARCHAR(20) REFERENCES  
EMPLOYEE(SSN), DEPENDENTNAME VARCHAR(20), GENDER VARCHAR(20), DOB  
DATE, RELATIONSHIP VARCHAR(20));
```

DLOCATION TABLE:

```
CREATE TABLE DLOCATION (DLOC VARCHAR(20), DNO VARCHAR(20)  
REFERENCES DEPARTMENT(DNO), PRIMARY KEY (DNO, DLOC));
```

PROJECT TABLE:

```
CREATE TABLE PROJECT (PNAME VARCHAR(20), PNO INTEGER PRIMARY  
KEY, PLOCATION VARCHAR(20), DNO VARCHAR(20) REFERENCES  
DEPARTMENT(DNO));
```

WORKS_ON TABLE:

```
CREATE TABLE WORKS_ON (ESSN VARCHAR(20) REFERENCES  
EMPLOYEE(SSN), PNO INTEGER REFERENCES PROJECT(PNO), PRIMARY  
KEY (ESSN, PNO), HOURS INTEGER);
```

a) Insert 5 to 10 rows into all the tables.

INSERT DATA INTO EMPLOYEE:

```
INSERT INTO EMPLOYEE (FNAME , MNAME , LNAME , SSN , DOB ,  
ADDRESS , GENDER, SALARY , SUPERSSN , DNO )  
VALUES ('John', 'B', 'Smith', '123456789', '1965-02-  
09', '731 Fondren', 'M', 30000, '333445555', 5), ('Franklin', 'T', 'Wo  
ng', '333445555', '1955-12-  
08', '638 Voss', 'M', 40000, '888665555', 5), ('Alicia', 'J', 'Zelaya'  
, '999887777', '1968-01-19', '3321  
Castle', 'F', 25000, '987654321', 4), ('Jennifer', 'S', 'Wallance', '9  
87654321', '1941-06-20', '291 Berry', 'F', 43000, '888665555', 4),  
  
('Ramesh', 'K', 'Narayana', '666884444', '1962-09-15', '975  
FireOak', 'M', 38000, '333445555', 5), ('Joyce', 'A', 'English', '453  
453453', '1972-07-21', '5631 Birch', 'F', 25000, '333445555', 5)
```

```
, ('Ahmad', 'V', 'Jabbar', '987987987', '1969-03-22', '980Dallas',
'M', 25000, '987987987', 4), ('James', 'E', 'Brog', '888665555', '193
7-10-10', '450Stone', 'M', 55000, 'NULL', 1);
```

INSERTINTODEPARTMENT:

```
-----
INSERT INTO DEPARTMENT (DNO, DNAME, MGRSTART DATE, MGRSSN)
VALUES ('5', 'Research', '1988-05-
22', '333445555'), ('4', 'Administration', '1995-01-
01', '987654321'), ('1', 'Headquarters', '1981-06-
19', '888665555');
```

INSERTINTODEPENDENT:

```
-----
INSERT INTO DEPENDENT (ESSN, DEPENDENTNAME, GENDER, DOB,
RELATIONSHIP) VALUES ('333445555', 'Alice', 'F', '1986-04-
05', 'Daughter'), ('333445555', 'Theodore', 'M', '1983-10-
25', 'Son'), ('333445555', 'Joy', 'F', '1958-05-
03', 'Spouse'), ('987654321', 'Abner', 'M', '1942-02-
28', 'Spouse'), ('123456789', 'Michael', 'M', '1988-01-
04', 'Son'), ('123456789', 'Elizabeth', 'F', '1967-05-05', 'Spouse');
```

INSERTINTODLOCATION:

```
-----
INSERT INTO DLOCATION (DLOC, DNO) VALUES
('Houston', '1'),
('Stafford', '4'),
('Bellaire', '5'),
('Sugarland', '5'),
('Houston', '5');
```

INSERTINTOPROJECT:

```
-----
INSERT INTO PROJECT (PNAME, PNO, PLOCATION, DNO) VALUES
('ProductX', 1, 'Bellaire', '5'),
('ProductY', 2, 'Sugarland', '5'),
('ProductZ', 3, 'Houston', '5'),
('Computerization', 10, 'Stafford', '4'),
('Reorganization', 20, 'Houston', '1'),
('Newbenefits', 30, 'Stafford', '4');
```

INSERTINTOWORKS_ON:

```
-----
INSERT INTO WORKS_ON (ESSN, PNO, HOURS)
VALUES ('123456789', 1, 32), ('123456789', 2, 47),
('666884444', 3, 40),
('453453453', 1, 20),
('333445555', 2, 20),
('333445555', 1, 10),
('333445555', 3, 10),
('333445555', 10, 10),
('999887777', 20, 10),
('999887777', 30, 30),
('987987987', 10, 10),
('987987987', 11, 35),
```

```
('987654321', 30, 5),
('987654321', 31, 20),
('888665555', 20, 15);
-----
```

b) Display all employees' names along with their department names.

```
mysql> CREATE VIEW RESULTB AS (SELECT FNAME,LNAME,DNAME FROM
      EMPLOYEE,DEPARTMENT WHERE EMPLOYEE.DNO=DEPARTMENT.DNO);
```

Query OK, 0 rows affected (0.06 sec)

```
mysql>SELECT * FROM RESULTB;
```

```
+-----+-----+-----+
| FNAME   | LNAME   | DNAME   |
+-----+-----+-----+
| John    | Smith   | Research |
| Franklin| Wong    | Research |
| Joyce   | English | Research |
| Ramesh  | Narayana| Research |
| James   | Brog    | Headquarters |
| Jennifer| Wallance| Administration|
| Ahmad   | Jabbar  | Administration|
| Alicia  | Zelaya  | Administration|
+-----+-----+-----+
```

8 rowsinset(0.02sec)

c) Display all employees' names along with their dependent details

```
mysql> CREATE VIEW RESULTC AS (SELECT FNAME,LNAME,DEPENDENTNAME
      FROM EMPLOYEE,DEPENDENT WHERE
      DEPENDENT.ESSN=EMPLOYEE.SSN);
```

Query OK, 0 rows affected (0.05 sec)

```
mysql> SELECT* FROM RESULTC;
```

```
+-----+-----+-----+
| FNAME   | LNAME   | DEPENDENTNAME|
+-----+-----+-----+
| Franklin| Wong    | Alice        |
| Franklin| Wong    | Theodore     |
| Franklin| Wong    | Joy          |
| Jennifer| Wallance| Abner        |
| John    | Smith   | Michael      |
| John    | Smith   | Elizabeth    |
+-----+-----+-----+
```

6 rowsinset(0.00sec)

d) Display name and address of all employees who work for Researchdepartment.

```
mysql> CREATE VIEW RESULTD AS (SELECT FNAME,LNAME,ADDRESS FROM
      EMPLOYEE,DEPARTMENT WHERE EMPLOYEE.DNO=DEPARTMENT.DNO
      ANDDNAME='RESEARCH');
```

Query OK, 0 rows affected (0.05 sec)mysql>SELECT*FROM RESULTD;

```
+-----+-----+-----+
| FNAME   | LNAME   | ADDRESS   |
+-----+-----+-----+
```

```

| John      |Smith      |731Fondren      |
|Franklin|Wong |638Voss      |
| Joyce     |English    |5631Rice |
|Ramesh     |Narayana|975FireOak|
+ ----+-----+ -----
4 rowsinset(0.00sec)
-----

```

e)List the names of all employees with two or more dependents

```

mysql> CREATE VIEW RESULTE AS (SELECT FNAME,LNAME FROM EMPLOYEE
      WHERE(SELECTCOUNT(*)FROM DEPENDENT WHERE SSN=ESSN)>=2);
Query OK, 0 rows affected (0.06 sec)
mysql>SELECT * FROM RESULTE;
+ ----+-----+ -----
| FNAME      |LNAME|
+ ----+-----+ -----
| John      |Smith|
|Franklin|Wong |
+ ----+-----+ -----
2 rowsinset(0.00sec)
-----

```

f)List the names of employee who have no dependents.

```

mysql> CREATE VIEW RESULTF AS (SELECT FNAME,LNAME FROM EMPLOYEE
      WHERE NOTEXISTS(SELECT*FROM DEPENDENTWHERESSN=ESSN));
Query OK, 0 rows affected (0.06 sec)mysql>SELECT*FROM RESULTF;
+ ----+-----+ -----
| FNAME      |LNAME      |
+ ----+-----+ -----
| Joyce     |English    |
|Ramesh|Narayana|
| James     |Brog       |
| Ahmad     |Jabbar     |
|Alicia|Zelaya |
+ ----+-----+ -----
5 rowsinset(0.01sec)
-----

```

g)List the names of employees who have atleast one dependent.

```

mysql>CREATE VIEW RESULTG AS(SELECT FNAME,LNAME FROM EMPLOYEE
      WHERE EXISTS (SELECT * FROM DEPENDENT WHERE SSN=ESSN) AND
      EXISTS (SELECT * FROM DEPARTMENT WHERE SSN=MGRSSN));
Query OK, 0 rows affected (0.05 sec)
mysql>SELECT*FROM RESULTG;

```

```

+ ----+-----+ -----
| FNAME      |LNAME      |
+ ----+-----+ -----

```

```

|Franklin|Wong |

```

```
|Jennifer|Wallance|
+ ----+-----+ -----
2 rowsinset(0.00sec)
```

h)List the names of the employees along with names of their supervisorsusingaliases.

```
mysql> CREATE VIEW RESULTH AS (SELECT E1.FNAME,E1.LNAME,E2.FNAME
AS SUPERVISOR FROM EMPLOYEEE1,EMPLOYEEE2 WHERE
E2.SSN=E1.SUPERSSN);
```

Query OK, 0 rows affected (0.05 sec)

```
mysql>SELECT *FROM RESULTH;
```

```
+ ----+-----+ -----+ -----
| FNAME    |LNAME      |SUPERVISOR|
+ ----+-----+ -----+ -----
| John     |Smith      |Franklin  |
|Franklin|Wong       |James     |
| Joyce    |English    |Franklin  |
|Ramesh    |Narayana   |Franklin  |
|Jennifer|Wallance   |James     |
| Ahmad    |Jabbar     |Ahmad     |
|Alicia    |Zelaya     |Jennifer  |
+ ----+-----+ -----+ -----
7 rowsinset(0.00sec)
```

i)Display name of the department and name of manager for all thedepartments.

```
mysql> CREATE VIEW RESULTI AS (SELECT DNAME,FNAME FROM EMPLOYEE
E,DEPARTMENT D WHERE E.SSN=D.MGRSSN);
```

Query OK, 0 rows affected (0.05 sec)

```
mysql>SELECT*FROM RESULTI;
```

```
+ ----+-----+ -----
| DNAME     |FNAME      |
+ ----+-----+ -----
|Headquarters |James      |
|Administration|Jennifer   |
|Research     |Franklin   |
+ ----+-----+ -----
rowsinset(0.00sec)
```

j)Display the name of each employee who has a dependent with the samefirstnameandgenderastheemployee.

```
mysql> CREATE VIEW RESULTJ AS (SELECT E.FNAME,E.LNAME FROM
EMPLOYEE AS EWHERE E.SSN IN (SELECT ESSN FROM EMPLOYEE,DEPENDENT
WHERE FNAME=DEPENDENTNAME AND EMPLOYEE.GENDER=DEPENDENT.GENDER));
```

Query OK, 0 rows affected (0.05 sec)

```
mysql>SELECT *FROM RESULTJ;
```

```
Emptyset(0.00sec)
```

4) Create the following tables based on the above Schema Diagram with appropriate data types and constraints in addition to the tables in Experiment

```
DEPT_LOCATIONS (Dnumber,Dlocation)
PROJECT (Pname, Pnumber, Plocation,Dnum)
WORKS_ON (ESSN,Pno,Hours)
```

TABLE CREATION :-

DLOCATIONTABLE:

```
CREATE TABLE DLOCATION (DLOC VARCHAR(20),DNO VARCHAR(20)
REFERENCESDEPARTMENT (DNO),PRIMARYKEY (DNO,DLOC));
```

PROJECTTABLE:

```
CREATE TABLE PROJECT (PNAME VARCHAR(20),PNO INTEGER PRIMARY
KEY,PLOCATIONVARCHAR(20),DNOVARCHAR(20)REFERENCESDEPARTMENT (DNO))
;
```

WORKS_ONTABLE:

```
CREATE TABLE WORKS_ON (ESSN VARCHAR(20) REFERENCES
EMPLOYEE (SSN),PNOINTEGERREFERENCESPROJECT (PNO),PRIMARYKEY (ESSN,PNO),HOURSINTEGER);
```

a) Insert 5 to 10 rows into all the tables.

```
INSERT INTO DLOCATION(DLOC,DNO)VALUES ('Houston','1'),
('Stafford','4'), ('Bellaire','5'), ('Sugarland','5'),
('Houston','5');
```

```
INSERT INTO PROJECT(PNAME,PNO,PLOCATION,DNO)VALUES
('ProductX',1,'Bellaire','5'), ('ProductY',2,'Sugarland','5'),
('ProductZ',3,'Houston','5'),
('Computerization',10,'Stafford','4'),
('Reorganization',20,'Houston','1'),('Newbenefits',30,'Stafford',
'4');
```

```
INSERT INTO WORKS_ON (ESSN,PNO,HOURS) VALUES ('123456789',1,32),
('123456789',2,47), ('666884444',3,40), ('453453453',1,20),
('333445555',2,20), ('333445555',1,10), ('333445555',3,10),
('333445555',10,10), ('999887777',20,10), ('999887777',30,30),
('987987987',10,10), ('987987987',11,35), ('987654321',30,5),
('987654321',31,20), ('888665555',20,15);
```

a) Find the names of the employees who work on all the projects controlled by the department Research.

```
mysql> CREATE VIEW RESULT4B AS (SELECT DISTINCT E.FNAME,E.LNAME
FROMEMPLOYEE E,DEPARTMENT D, PROJECT P,WORKS_ON W WHERE
D.DNAME='RESEARCH'ANDD.DNO=P.DNOANDW.ESSN=E.SSNANDP.PNO=W.
PNO);
```

Query OK, 0 rows affected (0.05 sec)

```
mysql>SELECT *FROM RESULT4B;
```

```
+-----+-----+
| FNAME | LNAME |
```

```

+ ----+-----+ -----
| John      |Smith      |
|Franklin|Wong      |
| Joyce     |English    |
|Ramesh     |Narayana   |
+ ----+-----+ -----
rowsinset(0.00sec)

```

b)List the project number, name and no. Of employees who work on that project for all the projects.

```

mysql> CREATE VIEW RESULT4C AS (SELECT .PNO,P.PNAME,COUNT(W.ESSN)
FROM PROJECT P,WORKS_ON W WHERE P.PNO=W.PNO GROUPBY
P.PNO,P.PNAME);

```

Query OK, 0 rows affected (0.09 sec)

```

mysql>SELECT *FROM RESULT4C;

```

```

+ ----+-----+ -----
| PNO|PNAME      |COUNT(W.ESSN)|
+ ----+-----+ -----
|    1|ProductX    |      3|
|    2|ProductY    |      2|
|    3|ProductZ    |      2|
|   10|Computerization|  2|
|   20|Reorganization  |      2|
|   30|Newbenefits  |      2|
+ ----+-----+ -----

```

```

-----
5 rowsinset(0.01sec)

```

c)List the names of all the projects controlled by the departments department wise.

```

mysql> CREATE VIEW RESULT4D AS (SELECT P.PNAME,D.DNAME FROM
PROJECT P,DEPARTMENT D WHERE P.DNO=D.DNO);

```

Query OK, 0 rows affected (0.06 sec)

```

mysql>SELECT*FROM RESULT4D;

```

```

+ ----+-----+ -----
| PNAME      |DNAME      |
+ ----+-----+ -----
|ProductX    |Research   |
|ProductY    |Research   |
|ProductZ    |Research   |
|Computerization|Administration|
|Reorganization  |Headquarters  |
|Newbenefits    |Administration|
+ ----+-----+ -----

```

```

6 rowsinset(0.01sec)

```

d) Retrieve the names of employees who work on all projects that Johnworkson.

```
mysql> CREATE VIEW RESULT4E AS (SELECT DISTINCT E.FNAME,E.LNAME
FROM EMPLOYEE E,WORKS_ON W WHERE E.SSN=W.ESSN AND W.PNO IN
(SELECT W.PNO FROM EMPLOYEE E,WORKS_ON W WHERE
E.SSN=W.ESSN AND E.FNAME='JOHN'));
```

Query OK, 0 rows affected (0.10 sec)

```
mysql>SELECT *FROM RESULT4E;
```

```
+ -----+-----+
| FNAME   | LNAME   |
+ -----+-----+
| John    | Smith   |
| Franklin| Wong    |
| Joyce   | English |
+ -----+-----+
```

```
-----
3 rows in set (0.00 sec)
```

e) List the project numbers for projects that involve an employee either as worker or as a manager of the department that controls the project.

```
mysql> CREATE VIEW RESULT4F AS (SELECT DISTINCT P.PNO FROM
PROJECT P,DEPARTMENT D,EMPLOYEE E WHERE D.MGRSSN=E.SSN
AND D.DNO=P.DNO) UNION (SELECT DISTINCT P.PNO FROM EMPLOYEE
E,PROJECT P,WORKS_ON W WHERE E.SSN=W.ESSN AND P.PNO=W.PNO);
```

Query OK, 0 rows affected (0.10 sec)

```
mysql>SELECT *FROM RESULT4F;
```

```
+ -----+
| PNO |
+ -----+
| 20 |
| 10 |
| 30 |
| 1 |
| 2 |
| 3 |
+ -----+
```

f) List the names of all employees in one department who work more than 10 hours on one specific project.

```
mysql> CREATE VIEW RESULT4G AS (SELECT E.FNAME,E.LNAME FROM
EMPLOYEE E,PROJECT P,DEPARTMENT D,WORKS_ON W WHERE
D.DNO=E.DNO AND D.DNAME='RESEARCH' AND D.DNO=P.DNO AND
P.PNAME='PRODUCTX' AND P.PNO=W.PNO AND W.ESSN=E.SSN AND
W.HOURS>10);
```

Query OK, 0 rows affected (0.11 sec)

```
mysql>SELECT *FROM RESULT4G;
```

```
+ -----+-----+
| FNAME | LNAME |
+ -----+-----+
```

```
| John | Smith |
```

|Joyce|English|

+ ----+-----

2 rowsinset(0.00sec)

g)For each project, list the project name and total hours (by all employees)spent on that project.

mysql> CREATE VIEW RESULT4H AS (SELECT P.PNAME,SUM(W.HOURS) FROM
PROJECT P,WORKS_ON W WHERE P.PNO=W.PNO GROUPBY P.PNAME,P.PNO);

Query OK, 0 rows affected (0.04 sec)mysql>SELECT*FROM RESULT4H;

+ ----+-----

| PNAME |SUM(W.HOURS) |

+ ----+-----

|Computerization| 20 |

|Newbenefits | 35|

|ProductX | 62 |

|ProductY | 67 |

|ProductZ | 50 |

|Reorganization | 25 |

+ ----+-----

7 rowsinset(0.00sec)

h)Retrieve the names of all employees who workon every project.

mysql> CREATE VIEW RESULT4I AS (SELECT E.FNAME FROM EMPLOYEE E
WHERE E.SSN IN (SELECT W.ESSN FROM WORKS_ON W WHERE
W.PNO=ALL(SELECT PNO FROM PROJECT)));

Query OK, 0 rows affected (0.06 sec)

mysql>SELECT*FROM RESULT4I;

Emptyset(0.00sec)

i)Retrieve the names of all employees who do not work on any project.

mysql> CREATE VIEW RESULT4J AS (SELECT E.FNAME,E.LNAME FROM
EMPLOYEE E WHERE E.SSN NOTIN(SELECT W.ESSN FROM WORKS_ON
W));

Query OK, 0 rows affected (0.08 sec)

mysql>SELECT*FROM RESULT4J;

Emptyset(0.01sec)

5) Create a view that has project name, controlling department name,number of employees and total hours worked on the project for each project with more than on employee working on it.

```
mysql> CREATE VIEW PROJECT_VIEW(PNAME,DNAME,NOOFEMP,NOOFHRS) AS
SELECT P.PNAME,D.DNAME,COUNT(W.ESSN),SUM(W.HOURS) FROM PROJECT
P,DEPARTMENT D,WORKS_ON W WHERE P.DNO=D.DNO AND P.PNO=W.PNO GROUP
BY W.PNO,P.PNAME,D.DNAME;
```

```
mysql>SELECT * FROM PROJECT_VIEW;
```

```
+-----+-----+-----+-----+
| PNAME      | DNAME      | NOOFEMP | NOOFHRS |
+-----+-----+-----+-----+
| ProductX    | Research    | 3       | 62      |
| ProductY    | Research    | 2       | 67      |
| ProductZ    | Research    | 2       | 50      |
| Computerization|Administration| 2       | 20      |
| Reorganization  |Headquarters | 2       | 25      |
| Newbenefits    |Administration| 2       | 35      |
+-----+-----+-----+-----+
6 rows in set (0.00sec)
```

a) List the projects that are controlled by one department from this view.

```
mysql> CREATE VIEW RESULT5A AS (SELECT PNAME FROM PROJECT_VIEW
WHERE DNAME='RESEARCH');
```

```
Query OK, 0 rows affected (0.09 sec)
```

```
mysql>SELECT * FROM RESULT5A;
```

```
+-----+
| PNAME      |
+-----+
| ProductZ    |
| ProductX    |
| ProductY    |
+-----+
3 rows in set (0.00sec)
```

b) List the managers of the controlling departments for all the projects.

```
mysql> CREATE VIEW RESULT5B AS (SELECT E.FNAME, E.LNAME, P.DNAME,
P.PNAMEFROM EMPLOYEE E, PROJECT_VIEW P,DEPARTMENT D WHERE
E.SSN=D.MGRSSN AND D.DNAME=P.DNAME);
```

```
Query OK, 0 rows affected (0.09 sec)
```

```
mysql>SELECT *FROM RESULT5B;
```

```
+-----+-----+-----+-----+
| FNAME      | LNAME      | DNAME      | PNAME      |
+-----+-----+-----+-----+
| James      | Brog       | Headquarters | Reorganization  |
```

```
|Jennifer|Wallance|Administration|Newbenefits      |
|Jennifer|Wallance|Administration|Computerization|
|Franklin|Wong   |Research   |ProductY   |
|Franklin|Wong   |Research   |ProductZ   |
|Franklin|Wong   |Research   |ProductX   |
```

```
+-----+-----+-----+-----+
6 rows in set (0.00 sec)
```

c) Demonstrate one update operation on this view.

```
IF PARENT TABLE HAS ANY CONSTRAINTS VIEW TABLE IS NOT UPDATED;
```

d) List the Location of the controlling departments for all the projects.

```
mysql> CREATE VIEW RESULT5D AS (SELECT P.PNAME,PV.DNAME,D.DLOC
FROM PROJECT_VIEW PV,DLOCATION D,PROJECT P WHERE
P.DNO=D.DNO AND P.PNAME=PV.PNAME);
```

Query OK, 0 rows affected (0.09 sec)

```
mysql> SELECT * FROM RESULT5D;
```

```
+-----+-----+-----+
| PNAME      | DNAME      | DLOC      |
+-----+-----+-----+
|ProductX    |Research    |Bellaire   |
|ProductX    |Research    |Houston    |
|ProductX    |Research    |Sugarland  |
|ProductY    |Research    |Bellaire   |
|ProductY    |Research    |Houston    |
|ProductY    |Research    |Sugarland  |
|ProductZ    |Research    |Bellaire   |
|ProductZ    |Research    |Houston    |
|ProductZ    |Research    |Sugarland  |
|Computerization|Administration|Stafford   |
|Reorganization   |Headquarters  |Houston    |
|Newbenefits      |Administration|Stafford   |
+-----+-----+-----+
```

e) Retrieve the data from the view.

```
mysql> SELECT * FROM PROJECT_VIEW;
```

```
+-----+-----+-----+-----+
| PNAME      | DNAME      | NOOFEMP | NOOFHRS |
+-----+-----+-----+-----+
|ProductX    |Research    |      3 |      62 |
|ProductY    |Research    |      2 |      67 |
|ProductZ    |Research    |      2 |      50 |
|Computerization|Administration|      2 |      20 |
|Reorganization   |Headquarters  |      2 |      25 |
|Newbenefits      |Administration|      2 |      35 |
+-----+-----+-----+-----+
```

6) Create a view emp from employee such that it contains only emp_no emp_name and department.

```
mysql> CREATE VIEW EMP_VIEW AS (SELECT E.SSN,E.FNAME,
```

```
E.LNAME,D.DNAME FROM EMPLOYEE,DEPARTMENTD);
QueryOK,0rowsaffected(0.11sec)
```

```
mysql>SELECT*FROMEMP_VIEW;
```

```
+-----+-----+-----+-----+
| SSN      | FNAME    | LNAME    | DNAME      |
+-----+-----+-----+-----+
| 123456789 | John     | Smith    | Headquarters |
| 123456789 | John     | Smith    | Administration |
| 123456789 | John     | Smith    | Research     |
| 333445555 | Franklin | Wong     | Headquarters |
| 333445555 | Franklin | Wong     | Administration |
| 333445555 | Franklin | Wong     | Research     |
| 453453453 | Joyce    | English  | Headquarters |
| 453453453 | Joyce    | English  | Administration |
| 453453453 | Joyce    | English  | Research     |
| 666884444 | Ramesh   | Narayana | Headquarters |
| 666884444 | Ramesh   | Narayana | Administration |
| 666884444 | Ramesh   | Narayana | Research     |
| 888665555 | James    | Brog     | Headquarters |
| 888665555 | James    | Brog     | Administration |
| 888665555 | James    | Brog     | Research     |
| 987654321 | Jennifer | Wallance | Headquarters |
| 987654321 | Jennifer | Wallance | Administration |
| 987654321 | Jennifer | Wallance | Research     |
| 987987987 | Ahmad    | Jabbar   | Headquarters |
| 987987987 | Ahmad    | Jabbar   | Administration |
| 987987987 | Ahmad    | Jabbar   | Research     |
| 999887777 | Alicia   | Zelaya   | Headquarters |
| 999887777 | Alicia   | Zelaya   | Administration |
| 999887777 | Alicia   | Zelaya   | Research     |
```

```
24rowsinset(0.00sec)
```

7) Create a view dept from department with only dept_no and location.

```
mysql>CREATE VIEW DEPT_VIEW AS (SELECTDNO, DLOCFROMDLOCATION);
```

QueryOK,0rowsaffected(0.09sec)

```
mysql>SELECT*FROMDEPT_VIEW;
```

```
+ ----+----+-----
```

```
| DNO|DLOC      |
```

```
+ ----+----+-----
```

```
|1    |Houston  |
```

```
|4    |Stafford |
```

```
|5    |Bellaire |
```

```
|5    |Houston  |
```

```
|5    |Sugarland|
```

```
+ ----+----+-----
```

```
5 rowsinset(0.00sec)
```

```
-----
```

8) Create a view that contains the details of employees who are managers only.

```
mysql> CREATE VIEW MANAGER AS (SELECT FNAME,LNAME FROM EMPLOYEE
                                WHERESSN=SUPERSSN);
```

QueryOK,0rowsaffected(0.05sec)

```
mysql>SELECT *FROM MANAGER;
```

```
+ ----+----+-----
```

```
| FNAME|LNAME      |
```

```
+ ----+----+-----
```

```
| Ahmad|Jabbar    |
```

```
+ ----+----+-----
```

```
1 rowinset(0.00sec)
```

9) Write a procedure to check whether the given number is Armstrong or not.

```
mysql>delimiter//
```

```
mysql>create procedure arms(in n int)
```

```
->begin
```

```
->declaremint;
```

```
->declaresumint;
```

```
->declaretempint;
```

```
->declarelenint;
```

```
->settemp=n;
```

```
->setsum=0;
```

```
->setlen=char_length(n);
```

```
->whilen>0do
```

```
->setm=mod(n,10);
```

```
->setsum=sum+pow(m,len);
```

```
->setn=ndiv10;
```

```
->endwhile;
```

```
->selectif(sum=temp,'armstrong','notaarmstrong');
```

```
->end
```

```
-> //
```

```
mysql>delimiter ;
```

```
mysql>call arms(153);
```

```

|if(sum=temp,'armstromg','notaarmstrong')|
+ -----+-----+-----+
|armstromg      |
+ -----+-----+-----+
1 rowinset(0.00sec)
QueryOK,0rowsaffected(0.00sec)
-----

```

10) Write a procedure which accept the account number of a customer and retrieve the balance.

```

mysql> create table customer(acc int,name varchar(20),bal
int);QueryOK,0rowsaffected(0.49sec)

mysql>insert into customer(acc,name,bal) values
(1,'sagar',1050),(2,'ram',150),(3,'bhim',100),
(4,'srk',105),(5,'sir',175);
Query OK, 5 rows affected (0.07 sec)Records:5      Duplicates:0
Warnings:0

```

```

mysql>select *from customer;

```

```

+ -----+-----+-----+
| acc      |name      |bal |
+ -----+-----+-----+
| 1 |sagar|1050|
| 2 |ram   | 150|
| 3 |bhim  | 100|
| 4 |srk   | 105|
| 5 |sir   | 175|
+ -----+-----+-----+
5 rowsinset(0.00sec)

```

```

mysql>delimiter//
mysql>create procedure tab(in ac int)
->begin
->select bal from customer where acc=ac;
->end
->//
Query OK,0rowsaffected(0.00sec)

```

```

mysql>delimiter ;
mysql>call tab(1);
+ -----+-----+
| bal      |
+ -----+-----+
| 1050 |
+ -----+-----+
1 rowinset(0.00sec)

```

11) Write a procedure which accepts the student number and displays the department in which he belongs to.

```
mysql>delimiter//
mysql>create procedure stud(in a int)
->begin
->select branch from student where dept_no=a;
->end
->//
QueryOK,0rowsaffected(0.00sec)
```

```
mysql>delimiter ;mysql>callstud(4);
+ -----+-----
|branch|
+ -----+-----
| AIDS      |
+ -----+-----
1 rowinset(0.00sec)
QueryOK,0rowsaffected(0.00sec)
```

12) Create a cursor to modify the salary of all employees belonging to'Research'departmentby150%.

```
mysql>delimiter//
->create procedure emp_sal_update(in dept varchar(20))
->begin
->declare flag int default0;
->declare s int default0;
->declare update_cur cursor for select SALARY from EMPLOYEE,
    DEPARTMENT where EMPLOYEE.DNO=DEPARTMENT.DNO and
    DEPARTMENT.DNAME=dept;
->declare continue handler for notfound set flag=1;
->open update_cur;
->getRec:LOOP
->fetch update_cur into s;
->if flag=1 then
->LEAVE getRec;
->endif;
->update EMPLOYEE,DEPARTMENT set SALARY=SALARY+(s*150/100) where
    EMPLOYEE.DNO=DEPARTMENT.DNO and DEPARTMENT.DNAME=dept;
->END LOOP getRec;
->close update_cur;
->end
->//
mysql>delimiter;
```

13) Consider the college database. Retrieve all students who haveregistered for a specific course and store their details

into another table using Cursor.

```
mysql>create table student(sno int primary key,sname varchar(20),
    dob date,course varchar(5),year int);
QueryOK,0rowsaffected(0.00sec)
```

```
mysql>insert into student(sno,sname,dob,course,year) values
    (222,"venu","1991-09-26","cse",2020),(333,'siva','1990-04-
    10','AIDS',2021),(111,"sagar","1990-03-16","cse",2020),
    (444,'Ramu','1980-05-12','IT',2010),(555,'niteesh','1993-
    03-26','ECE',2017),(666,'joel','1995-05-05','AIML',2002);
Query OK, 6 rows affected (0.00 sec)Records:6      Duplicates:0
Warnings: 0
```

```
mysql>select * from student;
```

```
+-----+-----+-----+-----+-----+
| sno | sname   | dob       | course | year |
+-----+-----+-----+-----+-----+
| 111 | sagar   | 1990-03-16 | cse    | 2020 |
| 222 | venu    | 1991-09-26 | cse    | 2020 |
| 333 | siva    | 1990-04-10 | AIDS   | 2021 |
| 444 | Ramu    | 1980-05-12 | IT     | 2010 |
| 555 | niteesh | 1993-03-26 | ECE    | 2017 |
| 666 | joel    | 1995-05-05 | AIML   | 2002 |
+-----+-----+-----+-----+-----+
6 rows in set (0.00sec)
```

```
mysql> create table temp_student(stdno int, stdname varchar(20),
    stdcourse varchar(20));
QueryOK,0rowsaffected(0.00sec)
```

```
mysql>delimiter//
```

```
mysql>create procedure getStudents(in x varchar(10))
```

```
->begin
```

```
->declare flag int default 0;
```

```
->declare stdno int;
```

```
->declare stdname varchar(20);
```

```
->declare stdcourse varchar(10);
```

```
->declare get_cur cursor for select sno,sname,course from student
    where course=x;
```

```
->declare continue handler for notfound set flag=1;
```

```
->open get_cur;
```

```
->getRec:LOOP
```

```
->fetch get_cur into stdno,stdname,stdcourse;
```

```
->if flag=1 then
```

```
->LEAVE getRec;
```

```
->endif;
```

```
->insert into temp_student values(stdno,stdname,stdcourse);
```

```
->ENDLOOP getRec;
```

```
->close get_cur;
```

```
->end
```

```
->//
```

```
mysql>delimiter;
```

```
mysql>call getStudents("cse");
```

```
Query OK, 0 rows affected, 1 warning (0.00 sec)mysql>select*from
```

```
temp_student;
+-----+-----+-----+
|stdno|stdname|stdcourse|
+-----+-----+-----+
|    111|sagar |cse  |
|    222|venu  | cse    |
+-----+-----+-----+
2 rowsinset(0.00sec)
```

14) Write an update trigger on Account table. The system should keep track of the records that are being updated.

```
mysql>delimiter//
->CREATE TRIGGER ACCUPDATE BEFORE UPDATE ON Account FOR EACHROW
->BEGIN
->DECLARE emsg varchar(250);
->SET emsg="NEW BALANCE CANNOT BE LESSTHAN OLD BALANCE";
->IF new.balance<old.balance THEN
->SIGNAL SQL STATE'45000'
->SET MESSAGE_TEXT=emsg;
->ENDIF;
->END
->//
mysql>delimiter ;
mysql>delimiter//

mysql>
```

15. Create NOSQL database for a Sample Application and Perform CURD operations.

FOR CREATING DATABASE:

How and when to create database

If there is no existing database, the following command is used to create a new database.

Syntax:

```
use DATABASE_NAME
```

If the database already exists, it will return the existing database.

Let' take an example to demonstrate how a database is created in MongoDB. In the following example, we are going to create a database "database".

See this example

```
>use db
```

output:

Switched to db database

To check the currently selected database, use the command db:

>db

output:

db

To check the database list, use the command show dbs:

>show dbs

output:

local 0.078GB

Here, your created database "db" is not present in the list, insert at least one document into it to display database:

>db.movie.insert({"name":"database"})

Here movie is collection, automatically created

output:

WriteResult({ "Inserted": 1})

>show dbs

output:

db 0.078GB

local 0.078GB

INSERT OPERATIONS:

The insert operation is one of the crucial operations in the database system. MongoDB supports the below mentioned three methods to insert document data in your database:

- insert()
- insertOne()
- insertMany()

INSERT METHOD:

The insert() method is used to insert one or multiple documents in a collection. The collection name is associated with the

insert() method and the parameters. The syntax to insert a single document is

In the above syntax, the document will consist of { name: "data_value" }. As it is a JSON document, these documents will consist of the data as name-value pairs, surrounded by curly braces, i.e. {}.

---->Syntax:

```
db.movie.insert({"name":"Avengers: Endgame"})
db.movie.find()
```

----->OUTPUT:

```
WriteResult({ "nInserted" : 1 })
> db.movie.find()
{ "_id" : ObjectId("5d10f858b0f4e87f32b2b2e8"), "name" :
"Avengers: Endgame" }
>
```

The **_id** which is provided by MongoDB is a 12-byte value of ObjectId which is prepared from the following values:

- a 4-byte value denoting the seconds as Unix epoch,
- a 3-byte device identifier value,
- a 2-byte processing id,
- a 3 byte counter which is a random value.

Create multiple documents using insert method():

It is also possible for you to insert multiple document values in a particular insert() method.

Let us take an **example** where you can insert multiple documents at a time:

```
db.movie.insert(
[
{ name: "Avengers: Infinity War" },
{ name: "Avengers: Endgame" }
]
)
```

It is to be noted that the documents are supplied in the form of an array. Document values are packed or enclosed in square brackets [] and separated by commas.

Executing the above statements will pop up with messages something like this:

OUTPUT:

```
> db.movie.insert([{name:"Avengers: Infinity War"},
,{name:"Avengers: Endgame"}])
BulkWriteResult({
  "writeErrors" : [ ],
  "writeConcernErrors" : [ ],
  "nInserted" : 2,
  "nUpserted" : 0,
  "nMatched" : 0,
  "nModified" : 0,
  "nRemoved" : 0,
  "upserted" : [ ]
})
>
```

EMBEDDED DOCUMENTS:

MongoDB also allow users to create document containing other documents, arrays of values, as well as arrays of documents.

EXAMPLE:

```
db.writer.insert({
  writername: "Stan Lee",
  comics: [
    { comics: "DC Comics", year: 2004, name: "Superman" },
    { project: "DC Comics", year: 2001, level: "Batman" },
    { project: "Marvel Comics", year: 1968, level: "Captain America" }
  ]
})
```

```
> db.writer.insert({
...   writername: "Stan Lee",
...   comics: [
...     { comics: "DC Comics", year: 2004, name: "Superman" },
...     { project: "DC Comics", year: 2001, level: "Batman" },
...     { project: "Marvel Comics", year: 1968, level: "Captain America" }
...   ]
... })
WriteResult({ "nInserted" : 1 })
> db.writer.find()
{ "_id" : ObjectId("5d1101a0b0f4e87f32b2b2f4"), "writername" : "Stan Lee", "comics" : [ {
  "comics" : "DC Comics", "year" : 2004, "name" : "Superman" }, { "project" : "DC Comics",
  "year" : 2001, "level" : "Batman" }, { "project" : "Marvel Comics", "year" : 1968, "level" : "Captain America" } ] }
> _
```

OUTPUT:

THE INSERTONE() METHOD:

This method is used to insert a single document into a collection.

method for a single document in a collection:

EXAMPLE:

```
db.movie.insertOne({ _id: 2, writername: "Stan Lee", name:
"Aquaman" })
```

In this case, you have a particular non-existent collection of data. In the case of the insert() method, a precise collection will get produced in case it does not exist previously.

Here you will observe that the output appeared to be different in format than that of insert() method:

```
> db.movie.insertOne({ _id: 2, writername: "Stan Lee", name: "Aquaman" })
{ "acknowledged" : true, "insertedId" : 2 }
>
```

OUTPUT:

INSERTMANY () METHOD:

As the name is explaining its working, is used for inserting multiple documents:

EXAMPLE:

```
db.developers.insertMany(
[
{ _id: 20, devname: "John Wick", tools: "Visual Studio", born:
1948 },
{ _id: 21, devname: "Ganesh Roy", tools: "Net Beans", born: 1945
},
{ _id: 22, devname: "Deeksha Raul", tools: "Unity 3D", born: 1954
}
]
)
```

```
> db.developers.insertMany(
... [
...   { _id: 20, devname: "John Wick", tools: "Visual Studio", born: 1948 },
...   { _id: 21, devname: "Ganesh Roy", tools: "Net Beans", born: 1945 },
...   { _id: 22, devname: "Deeksha Raul", tools: "Unity 3D", born: 1954 }
... ]
... )
{ "acknowledged" : true, "insertedIds" : [ 20, 21, 22 ] }
>
```

OUTPUT:

UPDATE OPERATION:

Use of update operation :

The update operation in a database is used to change or update values in a document. MongoDB makes use of the update() method for updating the documents within a MongoDB collection. For updating any specific documents, a new criterion can be incorporated with the update statement, which will only update the selected documents.

You have to put some specific condition in the form of the parameter to update the document in MongoDB. Here is a stepwise representation of how this can be performed:

- Make use of the update() method.
- Prefer the circumstance that you wish to implement for deciding which document needs an update in their database. Let us assume an example where you want to update your document which is having an id 4.
- Then make use of the set command for modifying the Field Name.
- Select which Field Name you wish for modifying and go into the new value consequently.

Syntax:

```
db.collection.update(  
  
<query>,  
  
<update>,  
  
  {  
  
    upsert: <boolean>,  
  
      multi: <boolean>,  
  
    writeConcern: <document>,  
  
      collation: <document>,  
  
    arrayFilters: [ <filterdocument1>, ... ]  
  
  }  
  
)
```

Example :

```
db.musicians.find({ _id: 4 }).pretty()
```

Output:

```
> db.musicians.find({ _id: 4 }).pretty()
{
  "_id" : 4,
  "name" : "Steven Morse",
  "instrument" : "Violin",
  "born" : 1954
}
>
```

So, now let us update the list of instrument played by this person, by making use of the \$set operator for updating a single field.

Example:

```
db.musicians.update(
  { _id: 4 },
  {
    $set: { instrument: ["Vocals", "Violin", "Octapad"] }
  }
)
```

Output:

```
> db.musicians.update(
...
... { _id: 4 },
... {
...   $set: { instrument: ["Vocals", "Violin", "Octapad"] }
... }
... )
WriteResult({ "nMatched" : 1, "nUpserted" : 0, "nModified" : 0 })
> db.musicians.find({ _id: 4 }).pretty()
{
  "_id" : 4,
  "name" : "Steven Morse",
  "instrument" : [
    "Vocals",
    "Violin",
    "Octapad"
  ],
  "born" : 1954
}
>
```

Characteristics of update of MongoDB:

- In case your field does not subsist in the current document, the \$set operator will insert a new field with the specified value, until and unless it violates the type constraint.
- MongoDB users can also make use of { multi: true } for updating multiple documents which will meet the query criteria.
- Making use of { upsert: true } for creating a new document is also possible as no document goes with the query.

Save() Method:

The save() method is used to replace a document with another document conceded in the form of a parameter.

In other words, it can be said that the save() is a blend of both update() as well as insert(). As the save() method is used, the document that exists will get updated. Otherwise, when it does not exist, it will create one. When an _id field is not specified, MongoDB automatically creates a document with this _id containing an ObjectId value (as conducted by the insert() method).

Example:

```
db.musicians.save({
  "_id": 4,
  "name": "Steven Morse",
  "instrument": "Violin",
  "born": 1954
})
```

Output:

```
> db.musicians.save({
...   "_id": 4,
...   "name": "Steven Morse",
...   "instrument": "Violin",
...   "born": 1954
... })
WriteResult({ "nMatched" : 1, "nUpserted" : 0, "nModified" : 0 })
> db.musicians.find().pretty()
{
  "_id" : 4,
  "name" : "Steven Morse",
  "instrument" : "Violin",
  "born" : 1954
}
>
```

DELETING DOCUMENTS IN MONGODB:

MongoDB allows you to delete a document or documents collectively using one of the three methods. Three methods provided by MongoDB for deleting documents are:

- `db.collection.deleteOne()`
- `db.collection.remove()`
- `db.collection.deleteMany()`

db.collection.deleteOne() Method:

This method is used to delete only a single document, even when more than one document matches with the criteria. Here is an example of using this `db.collection.deleteOne()` method for deleting the single document. To perform this process here, we have created a database and saved all the data separately.

Example:

```
db.programmers.find()
```

Output:

```
> db.programmers.find( )
{ "_id" : ObjectId("5d13002d3c59ac532372df63"), "name" : "James Gosling" }
{ "_id" : ObjectId("5d13002d3c59ac532372df64"), "name" : "Dennis Ritchie" }
{ "_id" : ObjectId("5d13002d3c59ac532372df65"), "name" : "Bjarne Stroustrup" }
>
```

Example:

```
db.programmers.deleteOne( { name: { $in: [ "Dennis Ritchie",
"Bjarne Stroustrup" ] } } )
```

Executing this statement, you will notice that, although two documents match the criteria, only one document gets deleted.

OUTPUT:

```
> db.programmers.deleteOne( { name: { $in: [ "Dennis Ritchie", "Bjarne Stroustrup" ] } } )
{ "acknowledged" : true, "deletedCount" : 1 }

> db.programmers.find()
{ "_id" : ObjectId("5d13002d3c59ac532372df63"), "name" : "James Gosling" }
{ "_id" : ObjectId("5d13002d3c59ac532372df65"), "name" : "Bjarne Stroustrup" }
> _
```

Delete all documents:

To delete all documents from the `programmers` collection, you have to write the query like this:

Example:

```
db.programmers.remove( {} )
```

Output:

```
> db.programmers.remove( {} )
WriteResult({ "nRemoved" : 2 })
>
```

But, when the filtering is done for removing elements, the `db.collection.remove()` method will document which matches the specified criteria. Here, we delete all documents where the artist name is "James Gosling".

Example:

```
db.programmers.remove( { name: "James Gosling" } )
```

Output:

```
> db.programmers.remove( { name: "James Gosling" } )
WriteResult({ "nRemoved" : 1 })
>
```

db.collection.deleteMany() Method:

MongoDB allows you to delete multiple documents using the `db.collection.deleteMany()` method. This method deletes all your documents whichever match its criteria mentioned in the parameter. To check its implementation of `db.collection.deleteMany()` method, you can use the method the same way as done previously:

Example:

```
db.programmers.deleteMany( { name: { $in: [ "Dennis Ritchie",
"Bjarne Stroustrup" ] } } )
```

Output:

```
> db.programmers.deleteMany( { name: { $in: [ "Dennis Ritchie", "Bjarne Stroustrup" ] } } )
{ "acknowledged" : true, "deletedCount" : 2 }
>
```

In this way, continuing from the previous example implementation, now all the records were also deleted, and the `deleteMany()` method was used this time. Now, if you try to find the documents using `find()` method, it won't show any result of your query or search.

QUERY DOCUMENTS IN MONGODB:

- **The find() method:** This method is used for querying data from a MongoDB collection.
The basic syntax for using this method is:

Syntax:

```
db.collection_name.find()
```

Example:

```
db.writers.find()
```

Various other options can be used to make the query specific. It will be discussed below.

- **The pretty() method:** This method is used for giving a proper format to the output extracted by the query.
The basic syntax for using this method is:

Syntax:

```
db.collection_name.find().pretty()
```

Example:

```
db.writers.find().pretty()
```

FILTERING CRITERIA OF MONGODB: It is also possible to filter your results by giving or adding some specific criteria in which you are interested to. For example, if you wish to see the Gaurav Mandes data, you can add a specific attribute to the find() to fetch the data of Gaurav Mandes from that particular database.

Example:

```
db.writers.find( { author: "Gaurav Mandes" } )
```

Output:

```
> db.writers.find( { author: "Gaurav Mandes" } )
{ "_id" : ObjectId("5d16f6a1e198c897a4105d0d"), "title" : "Networking", "description" : "Networking Essentials", "author" : "Gaurav Mandes" }
{ "_id" : ObjectId("5d16f6a1e198c897a4105d0e"), "title" : "Game Engineering", "description" : "Game Engineering and Development", "author" : "Gaurav Mandes" }
>
```

MongoDB query which Specify "AND" Condition:

MongoDB also allows you in specifying data values of the documents holding two or more specified values to be fetched from the query. Here are two examples showing the use of specifying queries using AND.

Example:

```
db.writers.find( { tools: "Visual Studio", born: 1948} )
```

MongoDB Query Which Specify "OR" Condition:

MongoDB allows users to specify either one or multiple values to be true. According to this, till one of the conditions is true, the document data will get returned. Here is an example showing the use of OR condition:

Example:

```
db.musicians.find({$or: [ { instrument: "Drums" }, { born: 1945 } ] } )
```

Output:

```
> db.musicians.find({$or: [ { instrument: "Drums" }, { born: 1945 } ]})
{ "_id" : 2, "name" : "Ian Paice", "instrument" : "Drums", "born" : 1948 }
{ "_id" : 3, "name" : "Roger Glover", "instrument" : "Bass", "born" : 1945 }
{ "_id" : 7, "name" : "Jeff Burrows", "instrument" : "Drums", "born" : 1968 }
>
```

\$in operator

The \$in operator is another special operator used in queries for providing a list of values in the query. When your document holds any of those provided values, it gets returned. Here is an example:

Example:

```
db.musicians.find( { "instrument": { $in: [ "Keyboards", "Bass" ] } } )
```

Output:

```
> db.musicians.find( { "instrument": { $in: [ "Keyboards", "Bass" ] } } )
{ "_id" : 3, "name" : "Roger Glover", "instrument" : "Bass", "born" : 1945 }
{ "_id" : 5, "name" : "Don Airey", "instrument" : "Keyboards", "born" : 1948 }
>
```